




Delock PoweredUSB cable male 12 V > 2 x 4 pin male 2 m for POS printers and terminals

Description

This PoweredUSB cable by Delock can be used to connect a device with 2 x 4 pin port to a PC or hub with PoweredUSB 12 V port. It is suitable for connecting various POS devices such as printers and terminals, **e.g. by IBM or other manufacturers**. The cable is used both for data transmission and for power supply of the connected device.

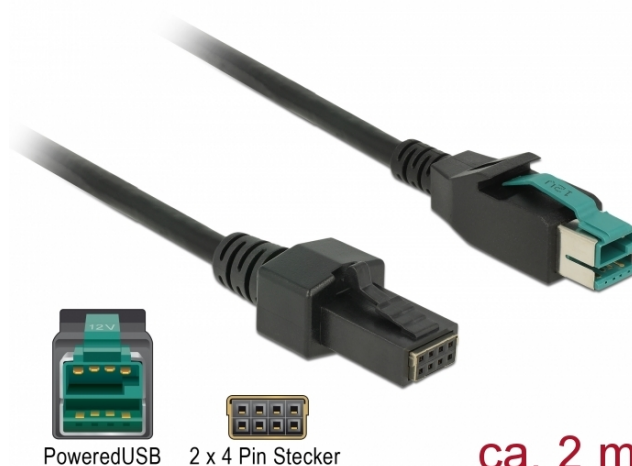

PoweredUSB



2 x 4 Pin Stecker

ca. 2 m

Specification

- Connectors:
 - 1 x PoweredUSB male 12 V >
 - 1 x Male 2 x 4 pin
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge:
 - 26 AWG data line
 - 20 AWG power line
- Cable diameter: ca. 6.5 mm
- Cable double shielded
- Data transfer rate up to 480 Mbps
- Colour: black
- Length incl. connectors (L): ca. 2 m

System requirements

- PC or hub with a free PoweredUSB 12 V female port
- Device with a free 2 x 4 pin female port

Package content

- PoweredUSB cable

Item no. 85483

EAN: 4043619854837

Country of origin: China

Package: Poly bag



Images

PoweredUSB
12 V

2 x 4 Pin Stecker



General	
Specification:	PoweredUSB
Interface	
Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x male 2 x 4 pin
Technical characteristics	
Data transfer rate:	USB 2.0 up to 480 Mb/s
Voltage:	12 V
Physical characteristics	
Cable diameter:	6.5 mm
Conductor gauge:	26 AWG data line
	20 AWG power line
Shielding:	double
Length:	2 m
Colour:	black