FLUX PRO WHITE

Full Tower Case

FLOW LUXURY

F-LUX Platform, abbreviation of Flow Luxury, features ultra case structure design for excellent airflow and 6 fans included, delivering enhanced GPU cooling performance.

- *FLUX Platform Patent Number: 11259440*

FLUX AIRFLOW

Multi-directional vent design, featuring extensive air intakes at the bottom, power supply chamber and lower sides, along with top vents and large-area mesh at the front, creating a dedicated Antec Flux airflow channel.

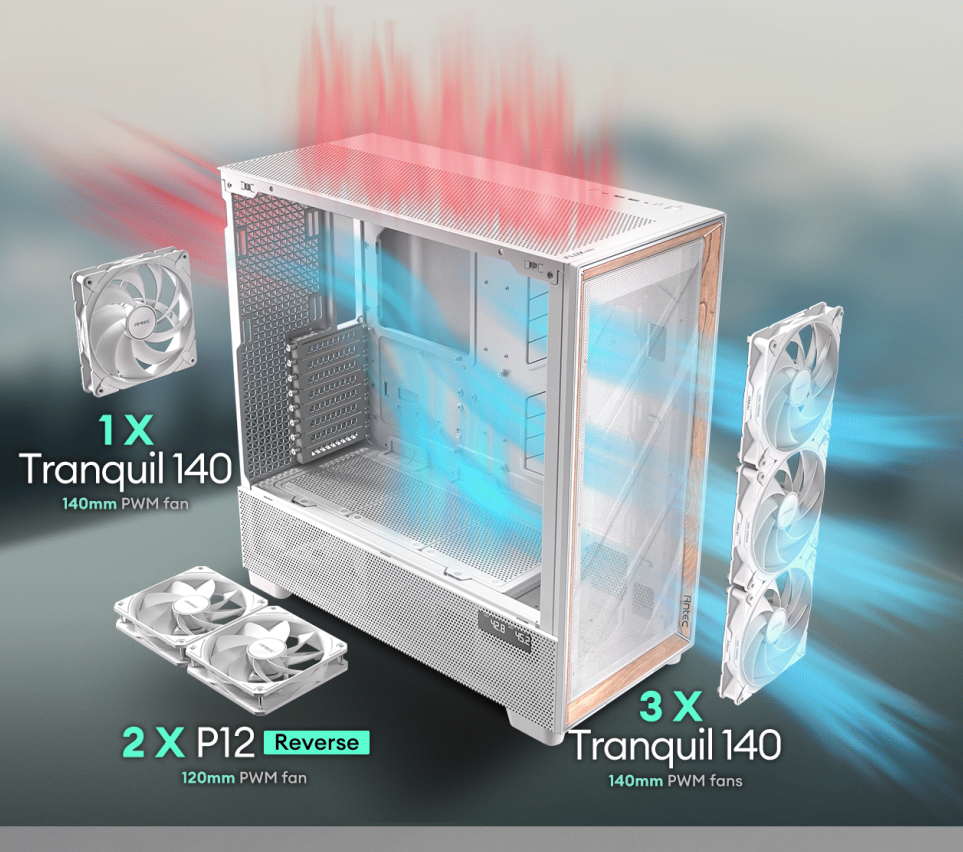

MULTI-DIRECTIONAL VENT DESIGN

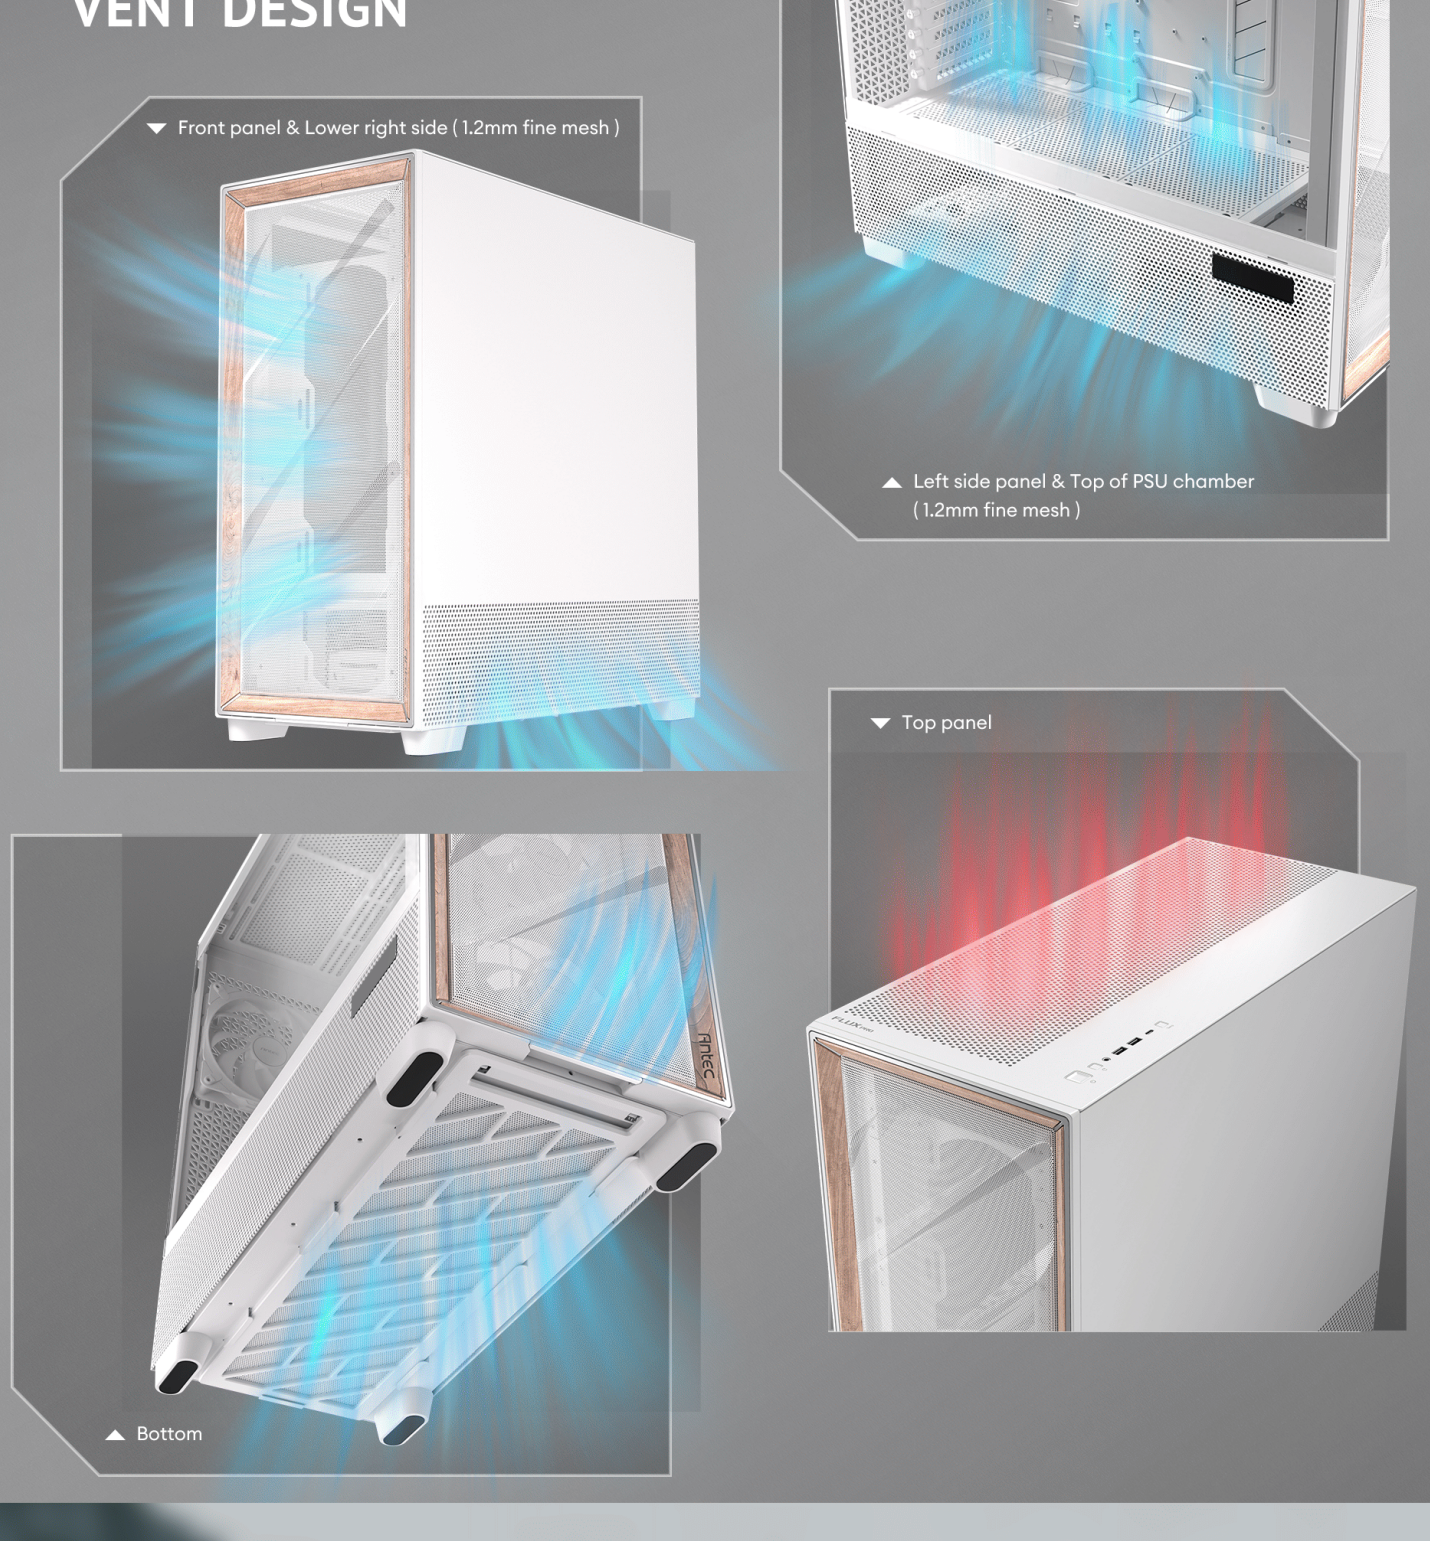
Front panel & Lower right side (1.2mm fine mesh)
Left side panel & Top of PSU chamber (1.2mm fine mesh)
Top panel
Bottom

PRE-INSTALLED 6 X HIGH-PERFORMANCE PWM FANS

2X P12R PWM Reverse
- Fan Speed | 600±200~1500±200 RPM
- Airflow | 61.46 CFM
- Noise | 27.6 dB(A)

4X Tranquil 140
- Fan Speed | 450±100~1500±150 RPM
- Airflow | 85.96 CFM
- Noise | 27.5 dB(A)

WITH BUILT-IN ARGB & PWM FAN CONTROL HUB IN SYNC WITH M/B

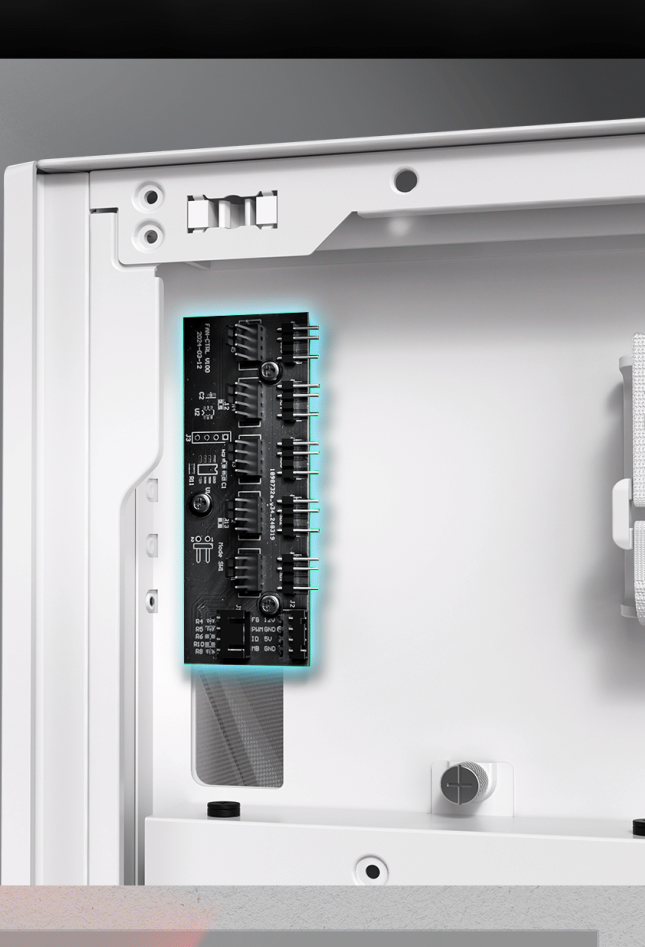

FLUX VERTICAL COOLING

Air intake via the PSU chamber maximizes heat dissipation while enhancing the intake effect for the graphics card.

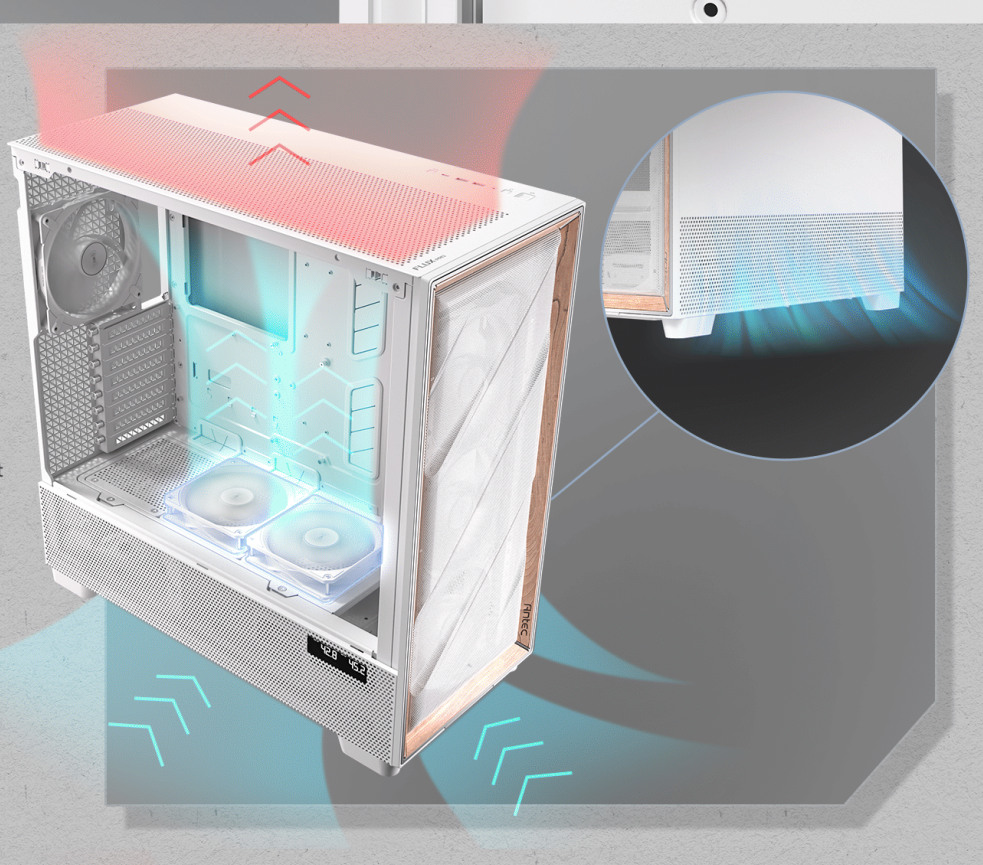

FLUX HORIZONTAL COOLING

Air intake via the front mesh provides smooth venting channel throughout the case.

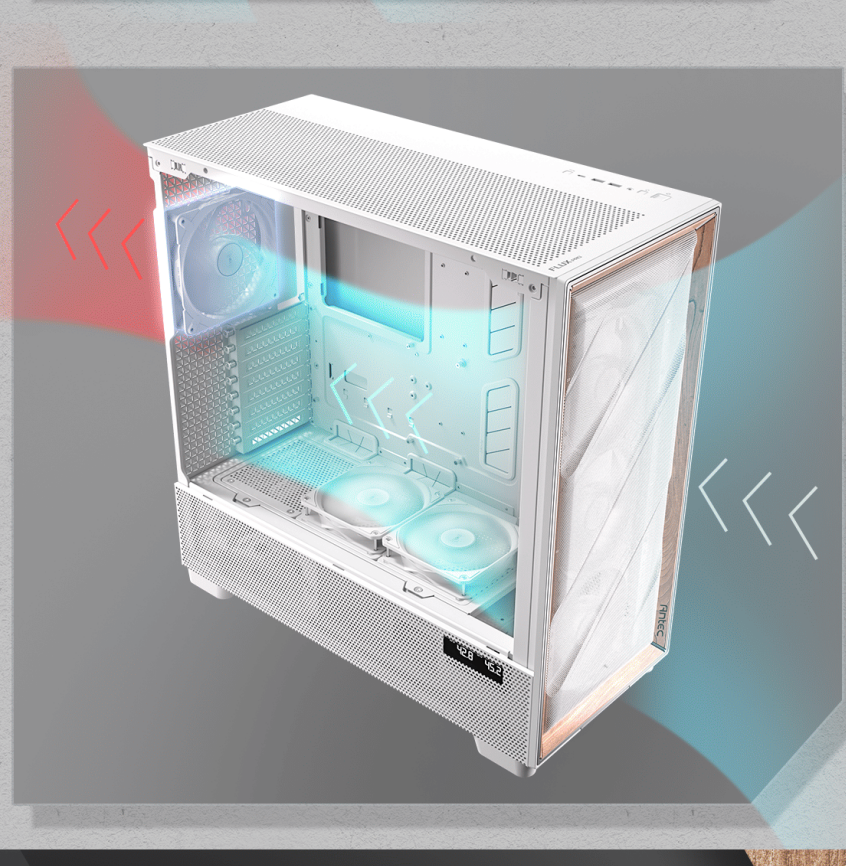

PREMIUM WOOD

Front panel is crafted with a combination of metal mesh and wood (birch) to create a high-quality texture with different materials, integrating seamlessly into your home design.

*Real Birch

INNOVATIVE iShift PSU 90° MOUNT

In addition to the standard PSU mount orientation, a 90-degree rotated option powered by the included extension cable is available. Plug in the cable connector from the right side, routing has never been easier.

Support 180mm long PSU.

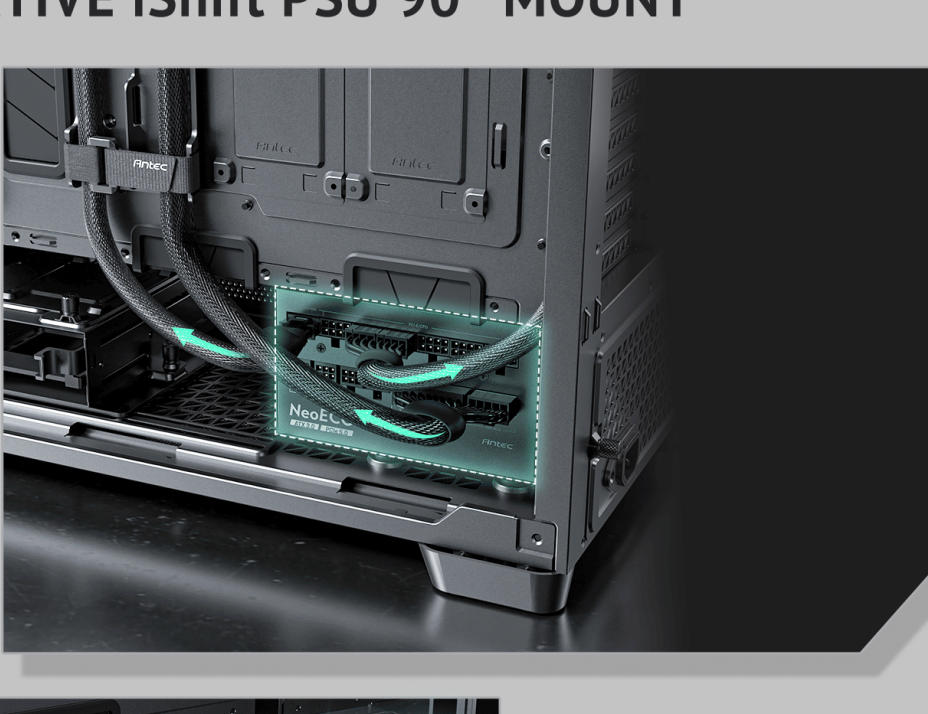

Reorienting the power supply enlarges the air intake at the bottom.

PSU INSTALLATION

Left side of PSU chamber is detachable, making it easy to install the power supply.

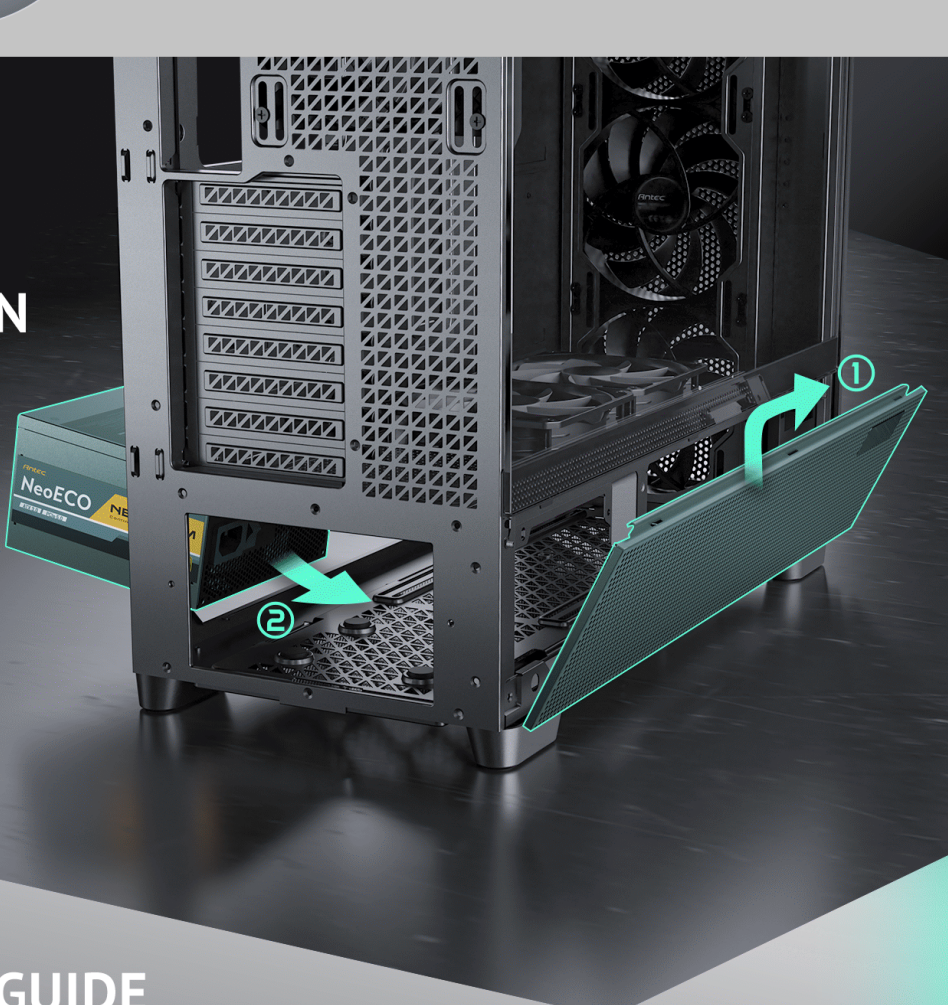

PSU SIDE MOUNT GUIDE

Compatible with various power interface layouts:

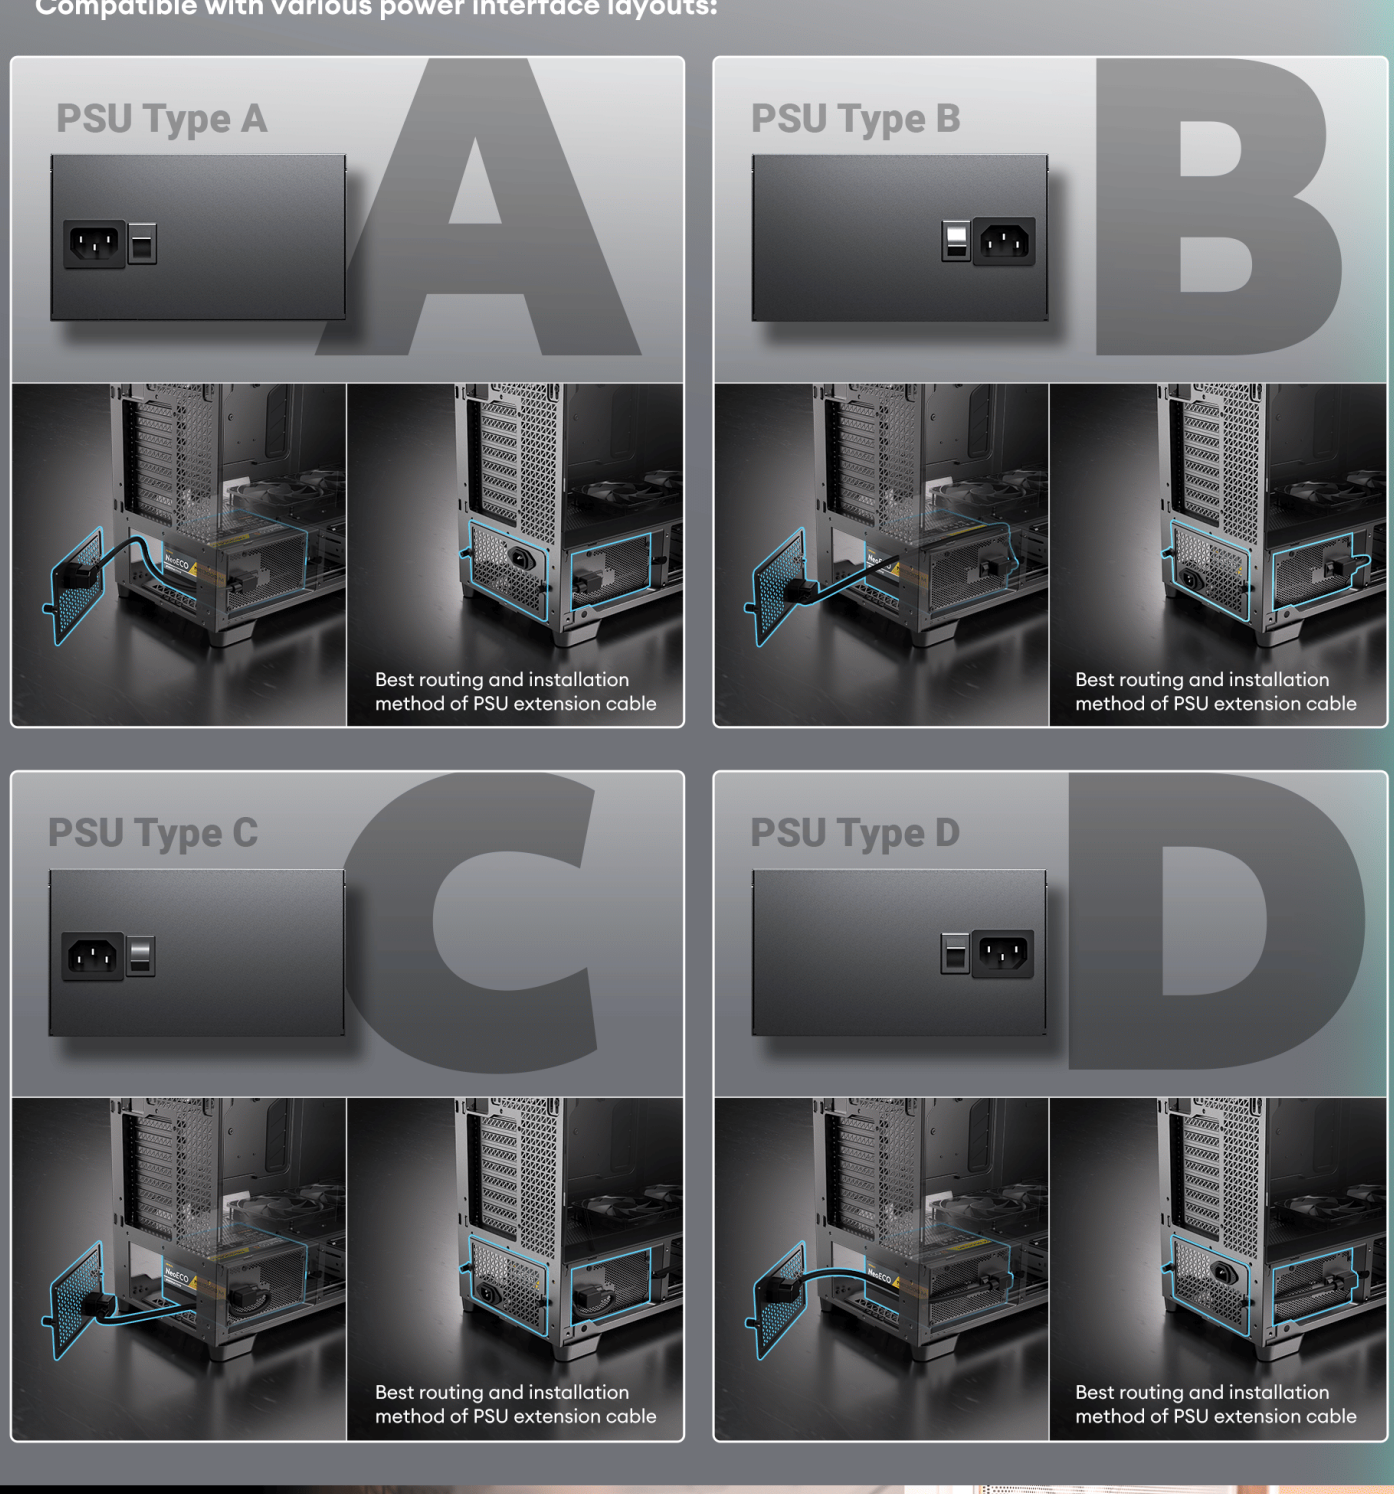
PSU Type A
A
Best routing and installation method of PSU extension cable
PSU Type B
B
Best routing and installation method of PSU extension cable
PSU Type C
C
Best routing and installation method of PSU extension cable
PSU Type D
D
Best routing and installation method of PSU extension cable

CPU/GPU DUAL TEMPERATURE DISPLAY

Intuitive hardware temperature display design with 4 different modes:

1. GPU & CPU On
2. GPU & CPU Off
3. Only CPU On
4. Only GPU On

**Antec iUnity software must be installed.*

ANTEC iUnity

The Antec iUnity provides instant data on PC specs, loads, and usage.

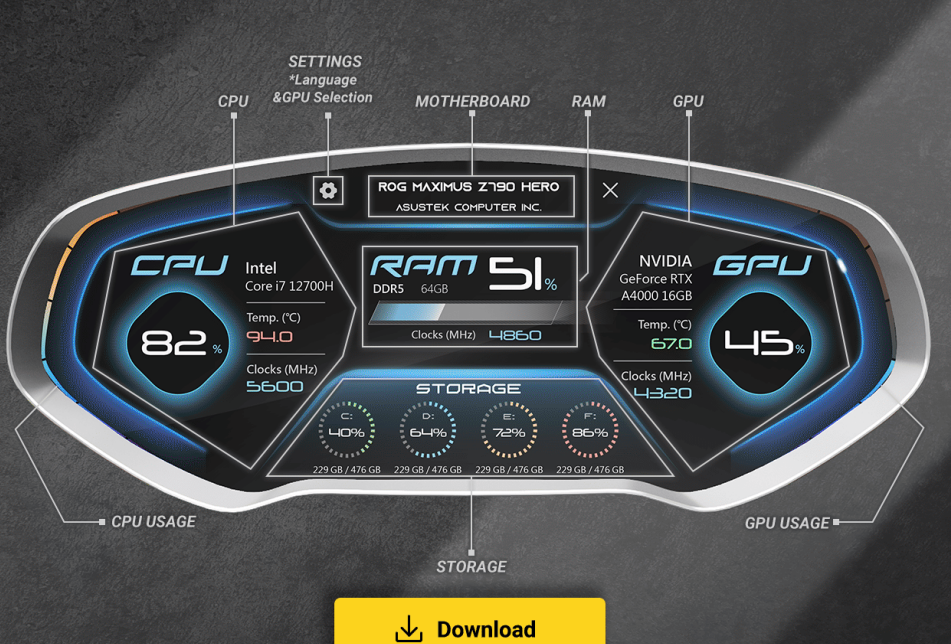

Download

REMOVABLE TOP COOLING BRACKET

Mount the fans/radiators on the cooling bracket first and install the cooling bracket back to the case.

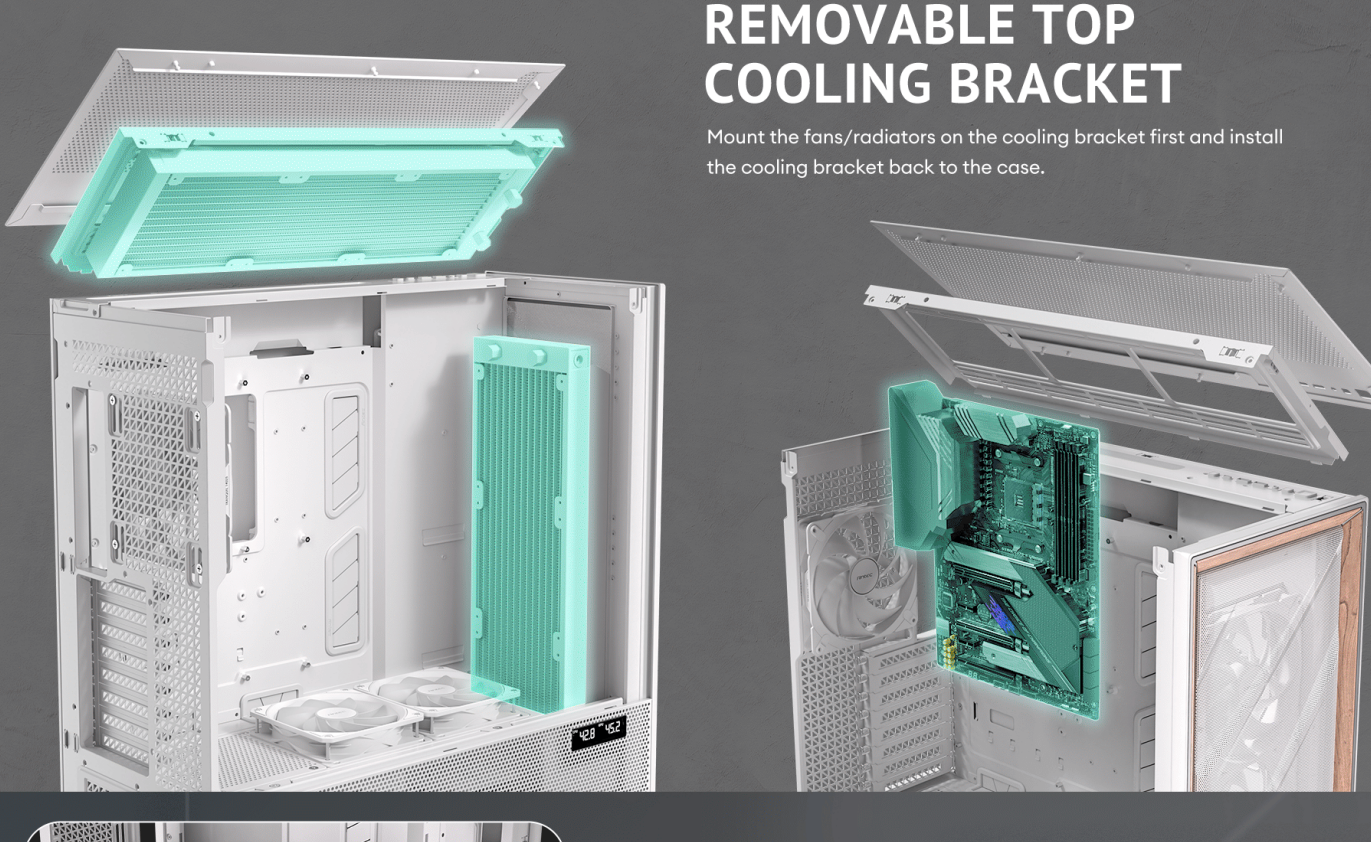

REMOVABLE COOLING BRACKET ON TOP OF PSU SHROUD

When fans (2 available) are installed on the case bottom, remove the top shroud bracket to maximize the airflow, fulfilling the optimal vertical cooling scheme.

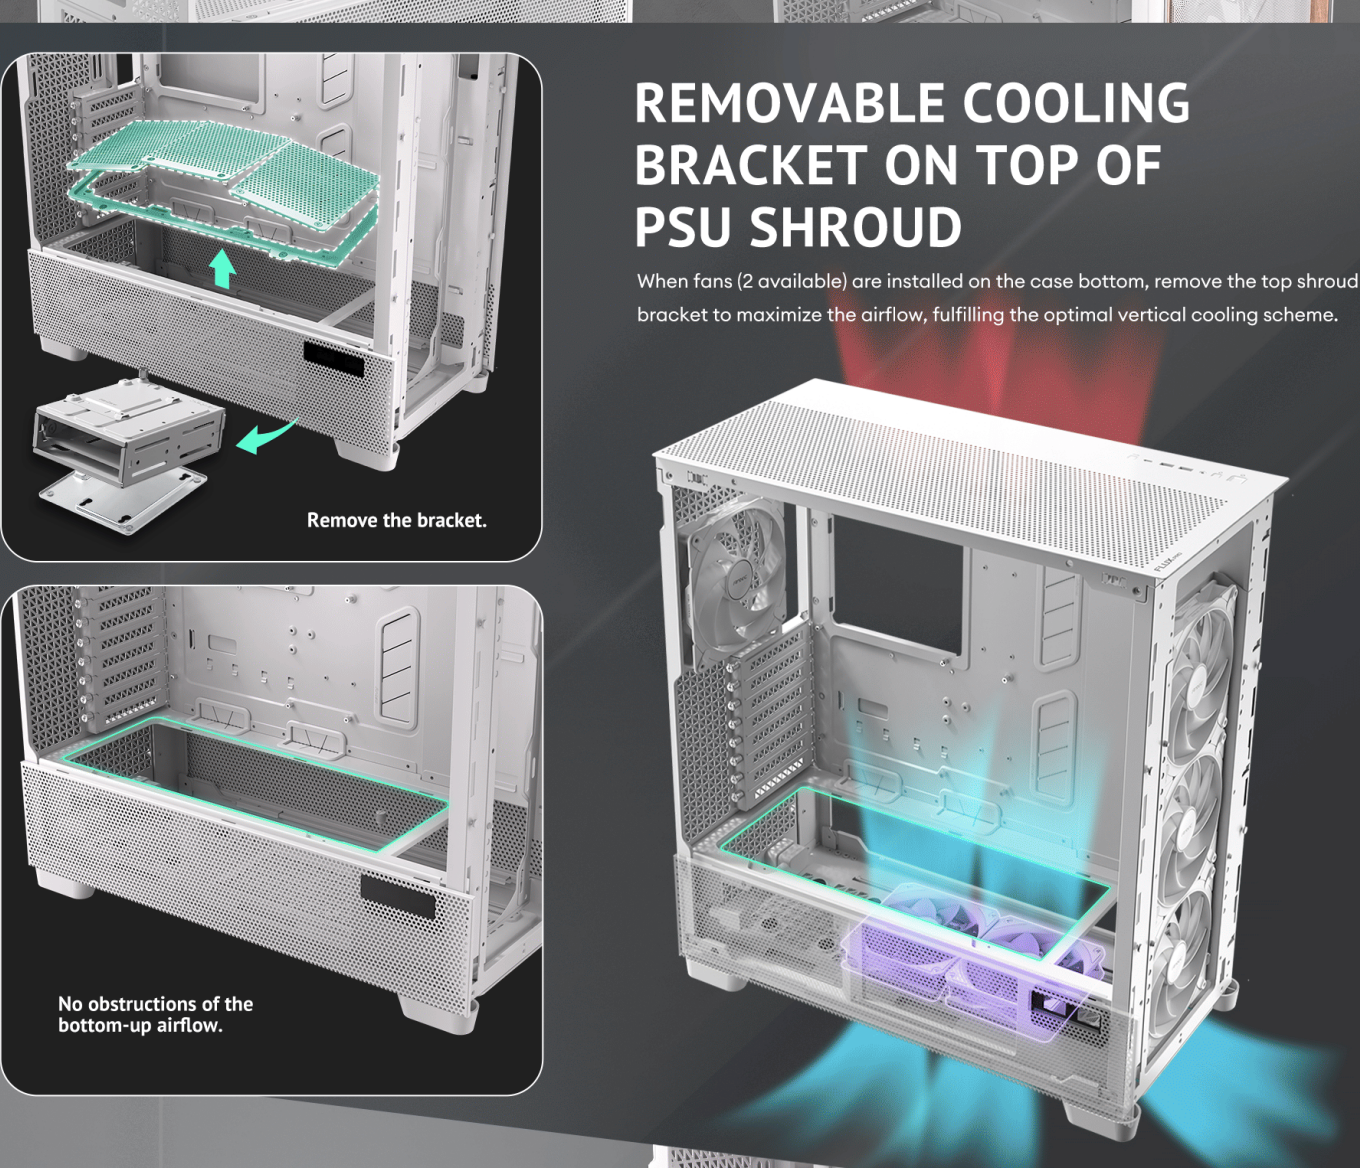

REMOVABLE COOLING BRACKET ON TOP OF PSU SHROUD

Remove all three PSU shroud covers to install 3 x 120mm fans or a 360mm push-pull radiator.

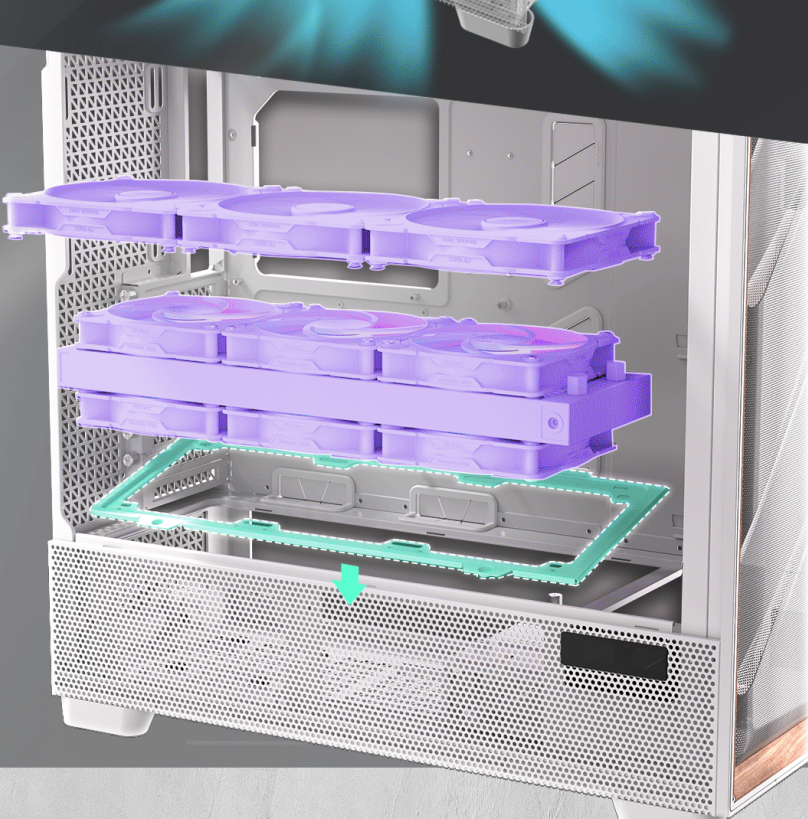

REMOVABLE FRONT COOLING BRACKET

1. Vertically adjustable to 5 positions to fit the huge top AIO.
2. Full cut-out design for enhanced air intake.
3. Can install fans or radiators.

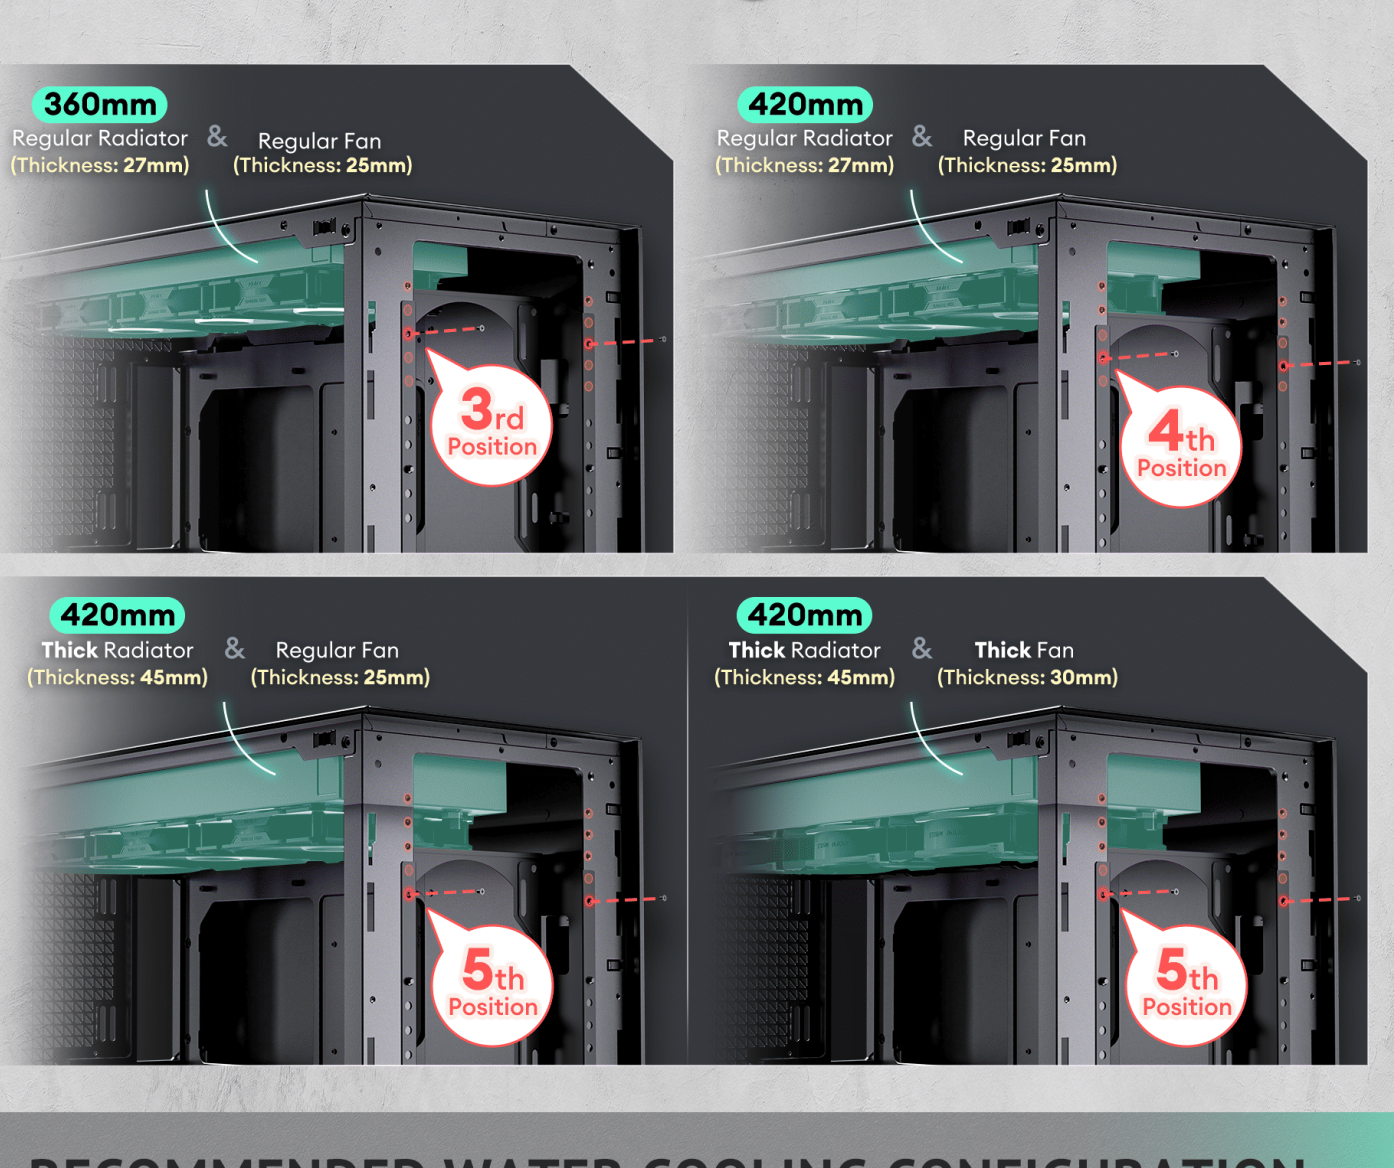
360mm
Regular Radiator (Thickness: 27mm)
&
Regular Fan (Thickness: 25mm)
3rd Position
420mm
Regular Radiator (Thickness: 27mm)
&
Regular Fan (Thickness: 25mm)
4th Position
420mm
Thick Radiator (Thickness: 45mm)
&
Regular Fan (Thickness: 25mm)
5th Position
420mm
Thick Radiator (Thickness: 45mm)
&
Thick Fan (Thickness: 30mm)
5th Position

RECOMMENDED WATER COOLING CONFIGURATION

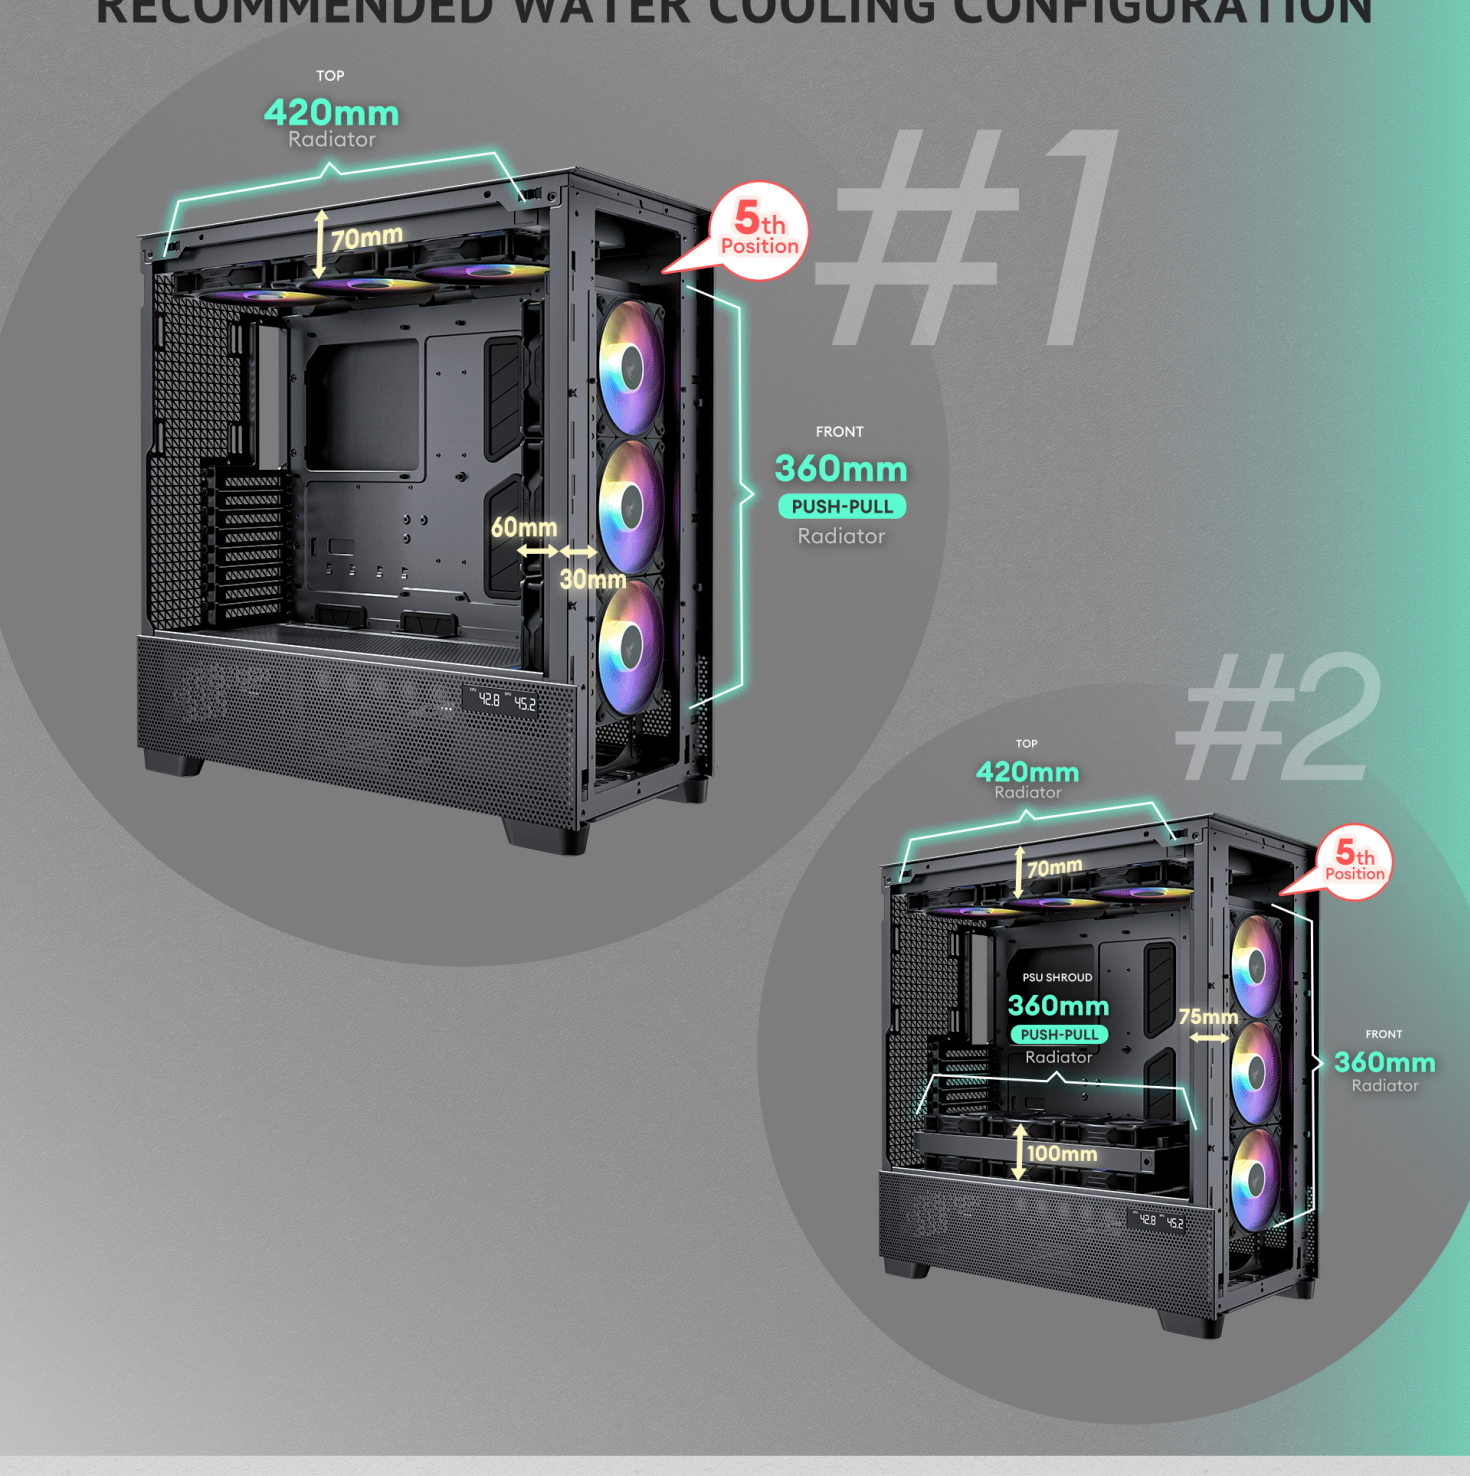

FAN & RADIATOR SUPPORT

Can only accommodate Top 420mm + Front 360mm radiator, or Front 420mm + Top 360mm radiator at the same time.

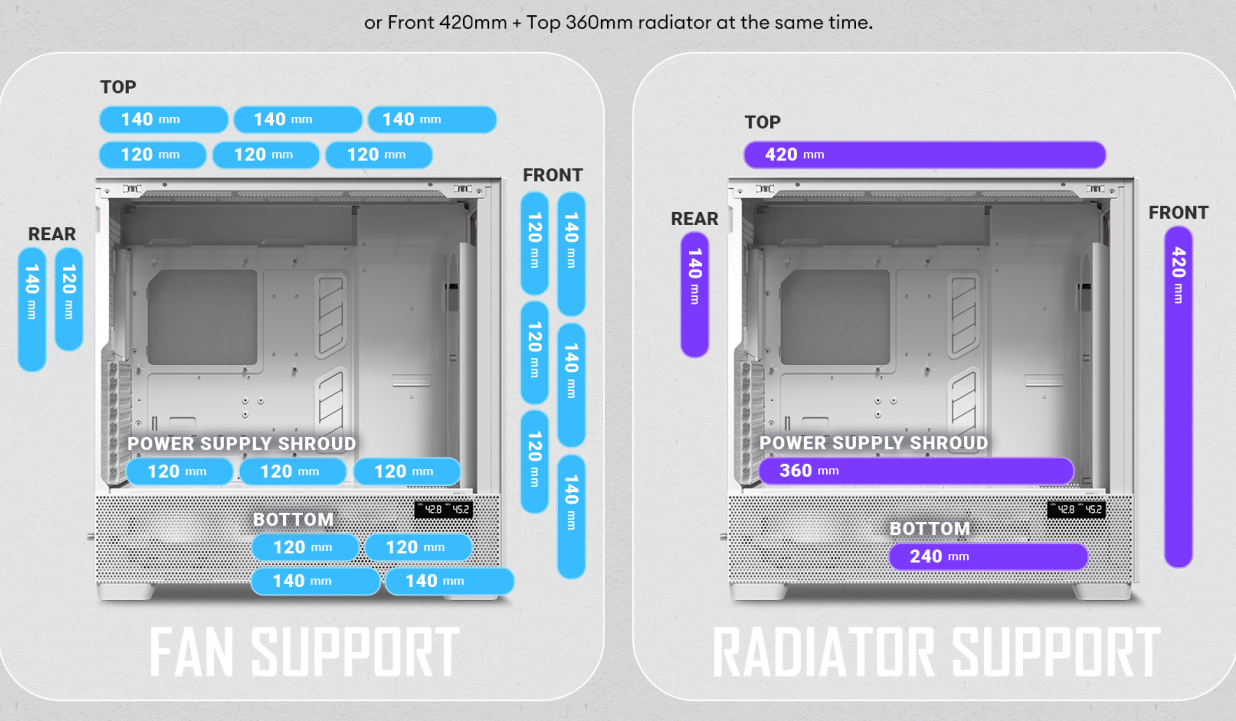

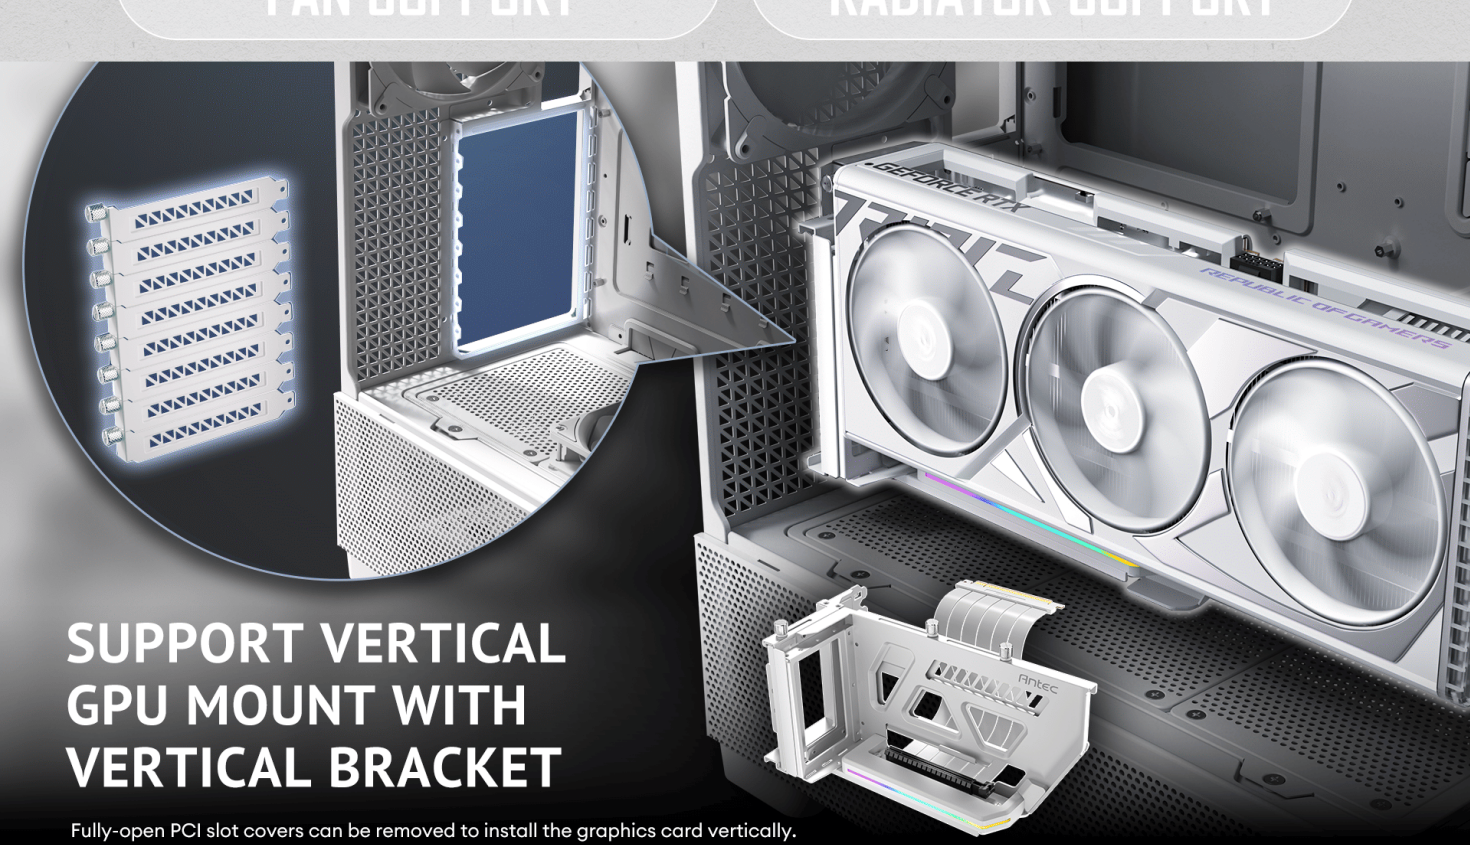

SUPPORT VERTICAL GPU MOUNT WITH VERTICAL BRACKET

Fully-open PCI slot covers can be removed to install the graphics card vertically.

TOOL-FREE PANEL DESIGN

OPTIMAL CABLE ROUTING EXPERIENCE

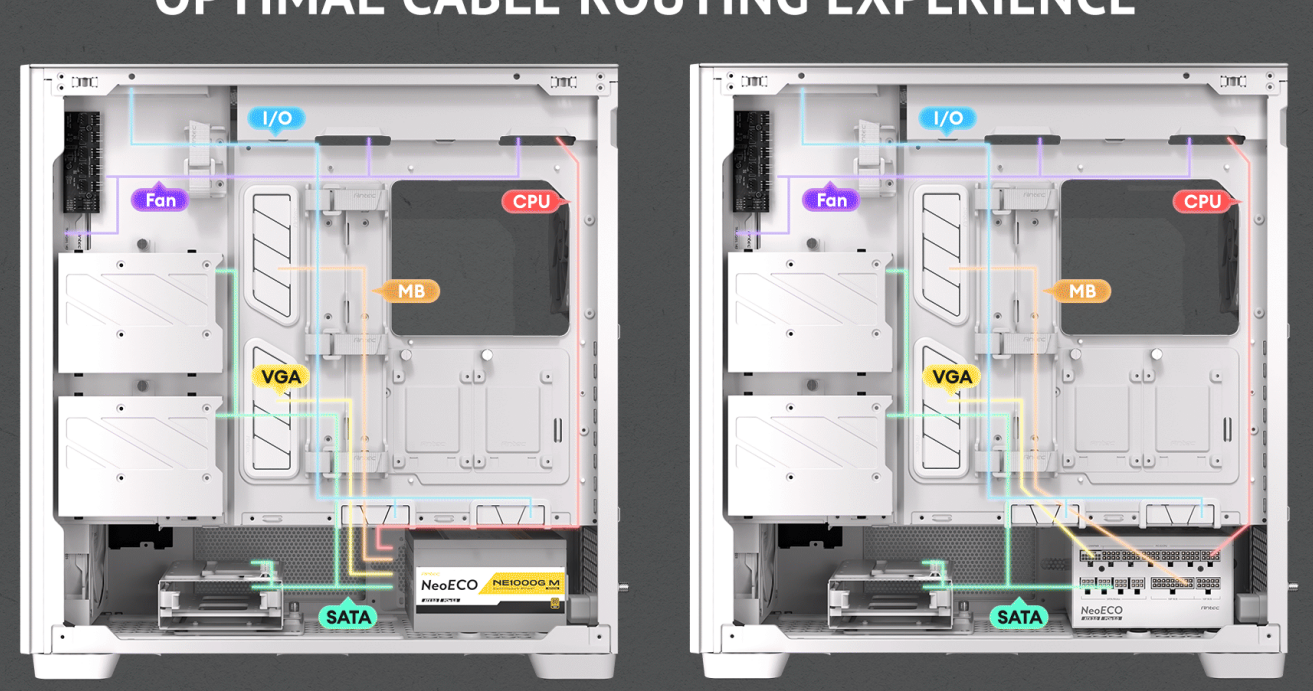

▲ For regular rear-mount PSU

▲ For iShift side-mount PSU

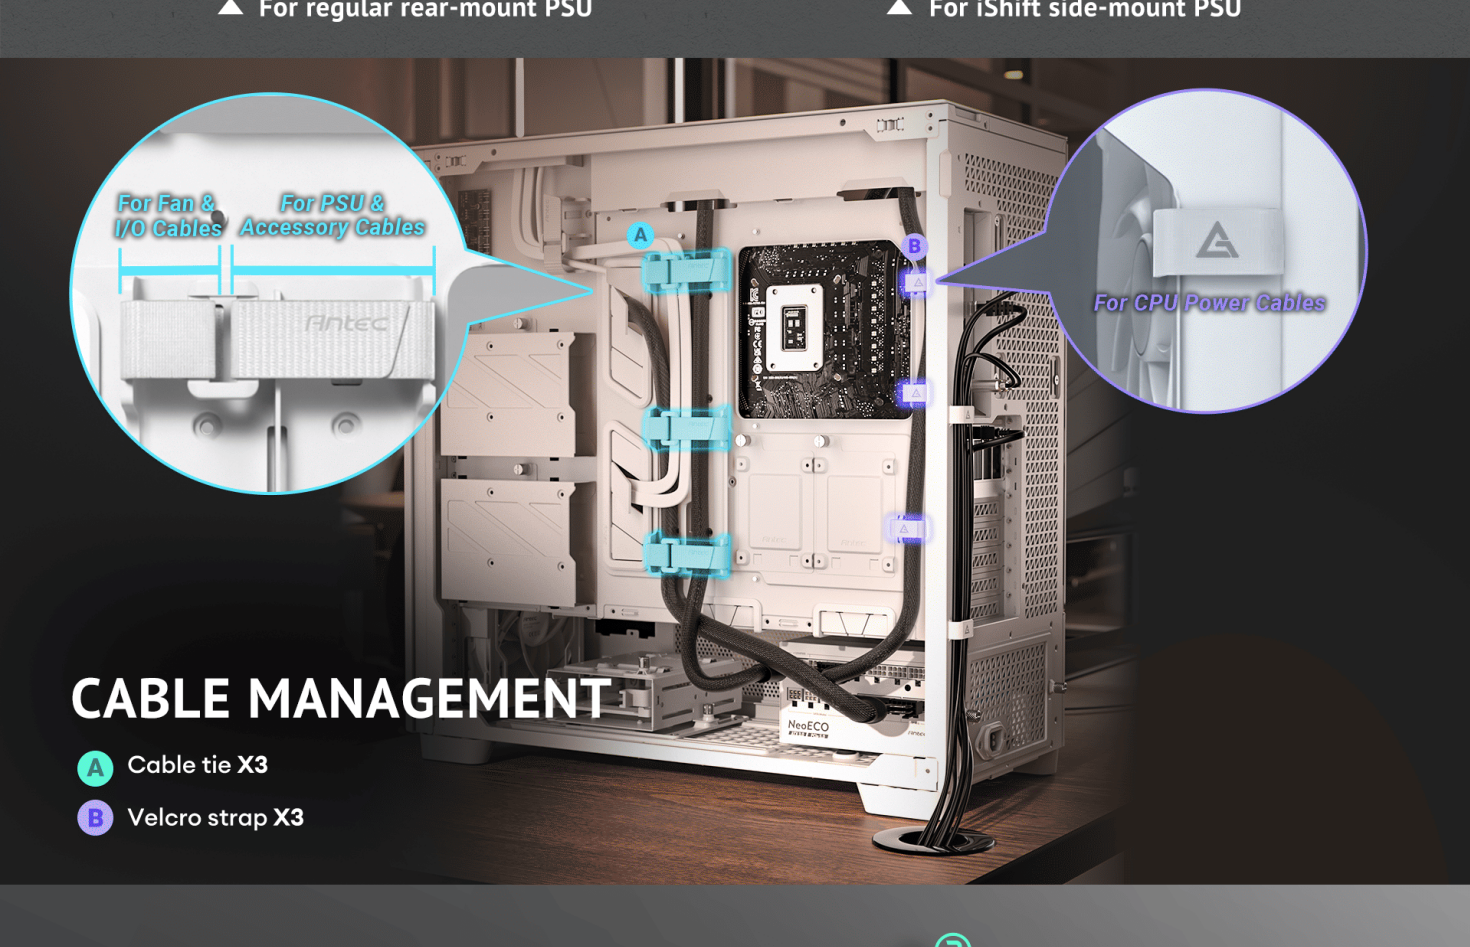

CABLE MANAGEMENT

- Ⓐ Cable tie **X3**
- Ⓑ Velcro strap **X3**

MODULAR HARD DRIVE CAGE

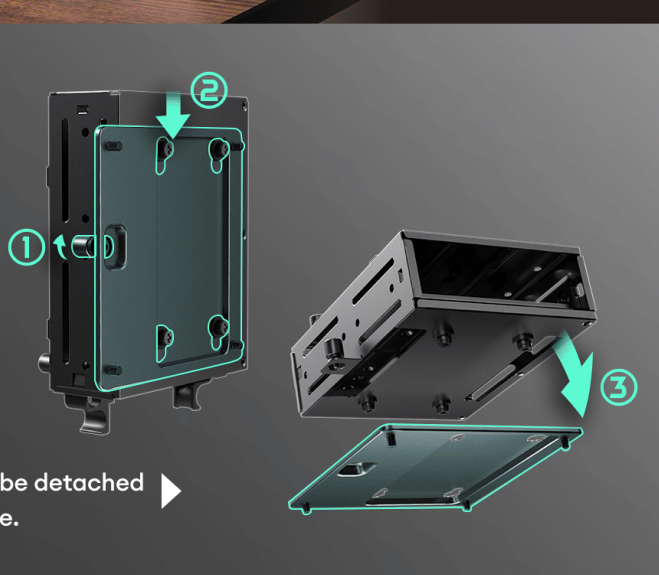

Hard drive cage can be detached from the bottom plate.

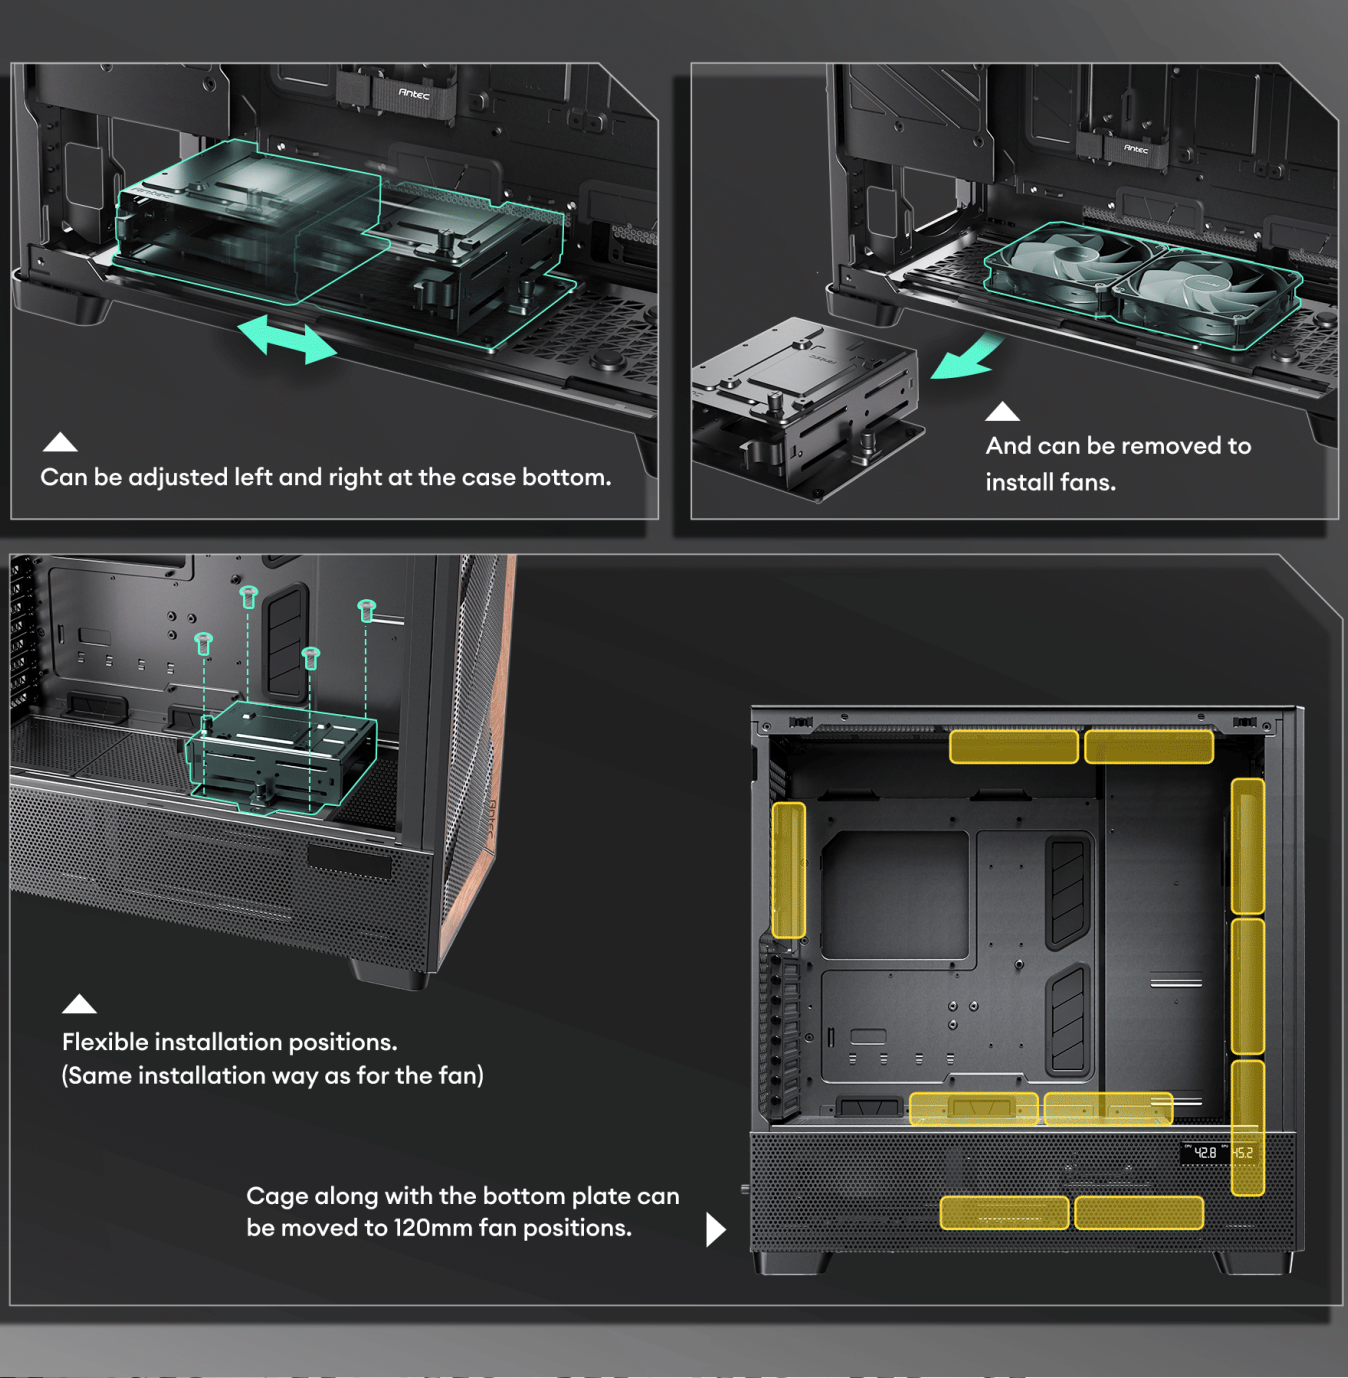

▲ Can be adjusted left and right at the case bottom.

▲ And can be removed to install fans.

▲ Flexible installation positions. (Same installation way as for the fan)

Cage along with the bottom plate can be moved to 120mm fan positions.

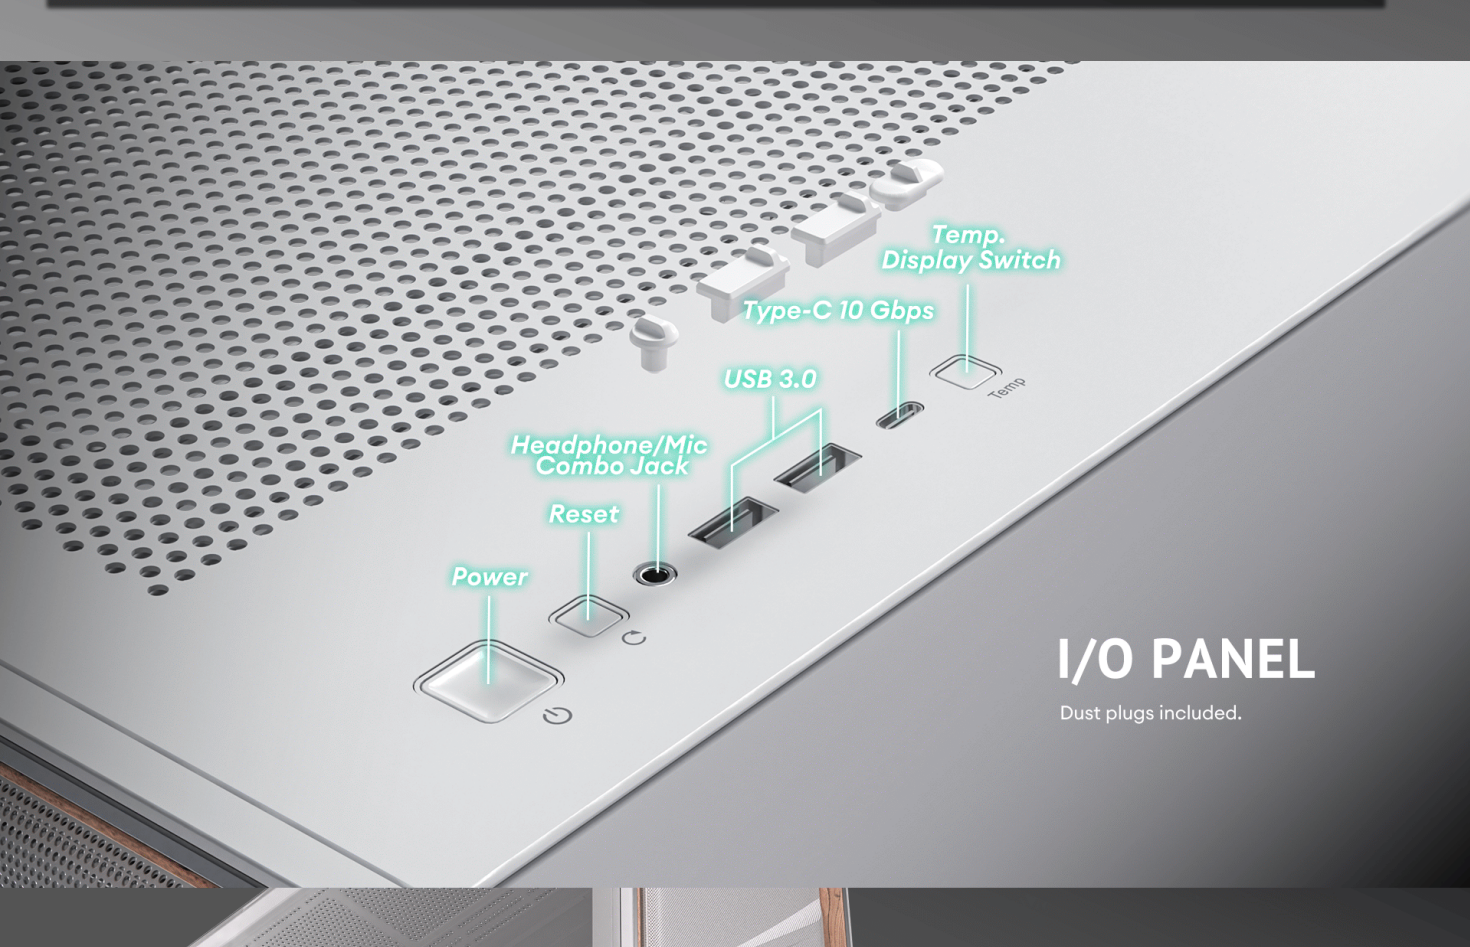

I/O PANEL

Dust plugs included.

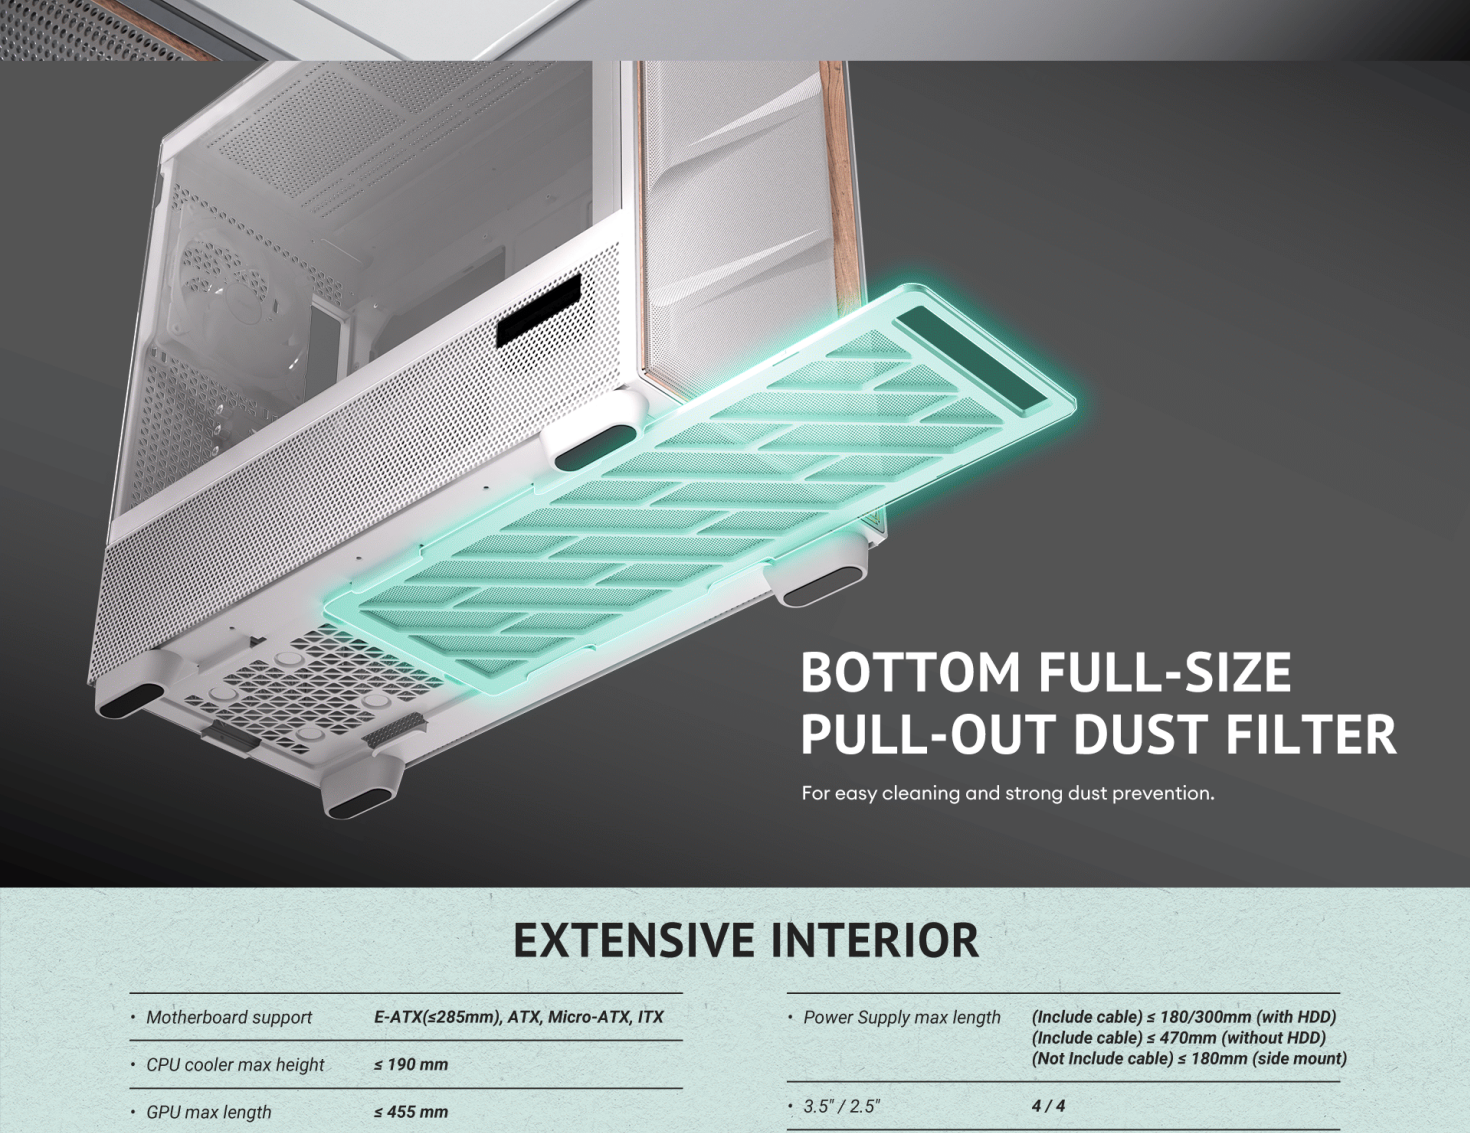

BOTTOM FULL-SIZE PULL-OUT DUST FILTER

For easy cleaning and strong dust prevention.

EXTENSIVE INTERIOR

Motherboard support	E-ATX(≤285mm), ATX, Micro-ATX, ITX
CPU cooler max height	≤ 190 mm
GPU max length	≤ 455 mm
Power Supply max length	(Include cable) ≤ 180/300mm (with HDD) (Include cable) ≤ 470mm (without HDD) (Not Include cable) ≤ 180mm (side mount)
3.5" / 2.5"	4 / 4
2.5"	2

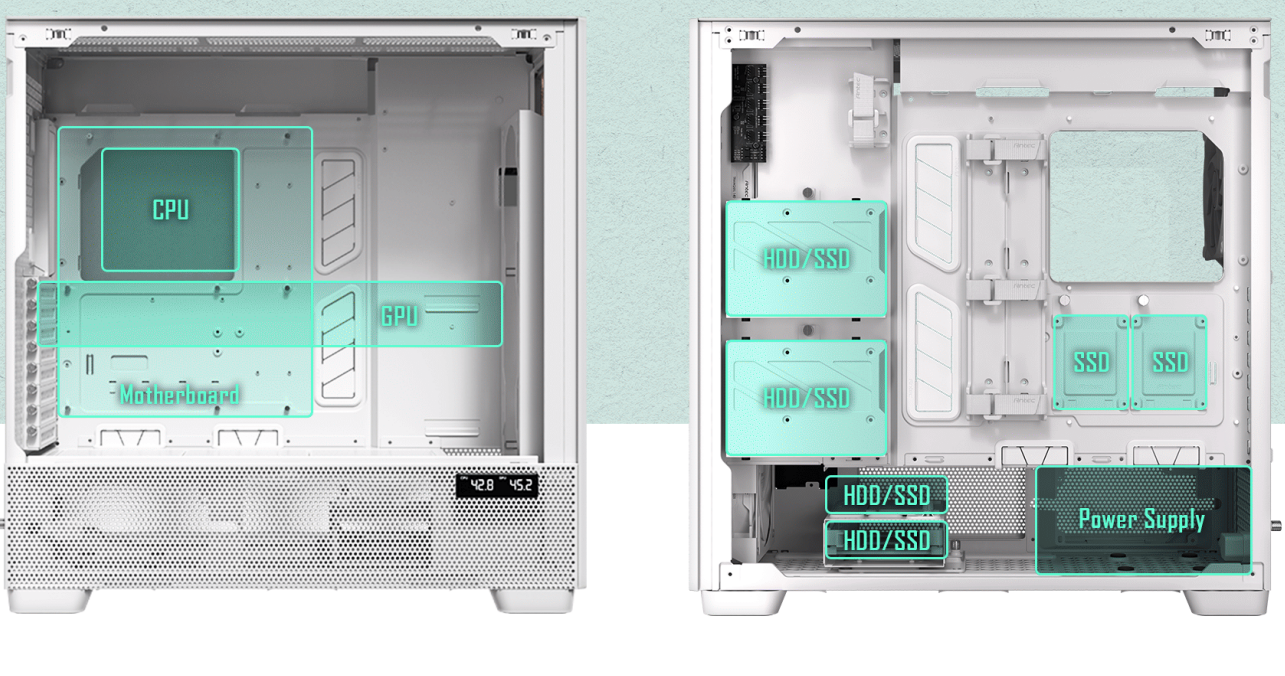

SPECIFICATION

Main Spec	
Motherboard Support	E-ATX(≤285mm), ATX, Micro-ATX, ITX
Form Factor	Full Tower
Case Material	Steel + Plastic + Glass + Wood
Side Window Material	4mm Tempered Glass
I/O Ports	Power, Reset , USB 3.0 x 2, Type-C 10 Gbps x 1, Headphone/Mic Combo Jack, Temp. Display Switch
Case Dimensions (DxWxH)	530 x 245 x 545 mm
Box Dimensions (DxWxH)	623 x 347 x 649 mm

Compatibility & Clearances	
CPU Cooler Max Height	≤ 190mm
GPU Max Length	≤ 455mm
Power Supply Max Length	(Include cable) ≤ 180/300mm (with HDD) (Include cable) ≤ 470mm (without HDD) (Not Include cable) ≤ 180mm (side mount)

Fan Support	
Front	3 x 120mm / 3 x 140mm
Top	3 x 120mm / 3 x 140mm
Power Supply Shroud	3 x 120mm
Bottom	2 x 120mm / 2 x 140mm
Rear	1 x 120mm / 1 x 140mm
Included Fan(s)	3 x 140mm Tranquil PWM fans in front + 2 x 120mm P12 Reverse PWM fans on PSU shroud + 1 x 140mm Tranquil PWM fan in rear

Radiator Support	
Front	Up to 420mm
Top	Up to 420mm
Power Supply Shroud	Up to 360mm
Bottom	Up to 240mm
Rear	Up to 140mm

Expansion Slots	
Standard	8

Drive Bays	
3.5" / 2.5"	4 / 4
2.5"	2

General	
Dust Filter	Bottom
Net Weight	13.60 kg
Gross Weight	16.65 kg
Warranty	2 years
UPC#	0-761345-10155-4 (FLUX PRO White) 0-761345-10156-1 (FLUX PRO White_EUV)

Antec