



Datenblatt - Fiche technique - Data sheet

11.04.5566




ROLINE GOLD HDMI High Speed Kabel, ST-ST, 10,0m

ROLINE GOLD Câble HDMI High Speed, M-M, 10 m

ROLINE GOLD HDMI High Speed Cable, M/M, 10 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
△1	B	ECR # 100330-4 EDIT BAR CODE NO.	03/30/10'

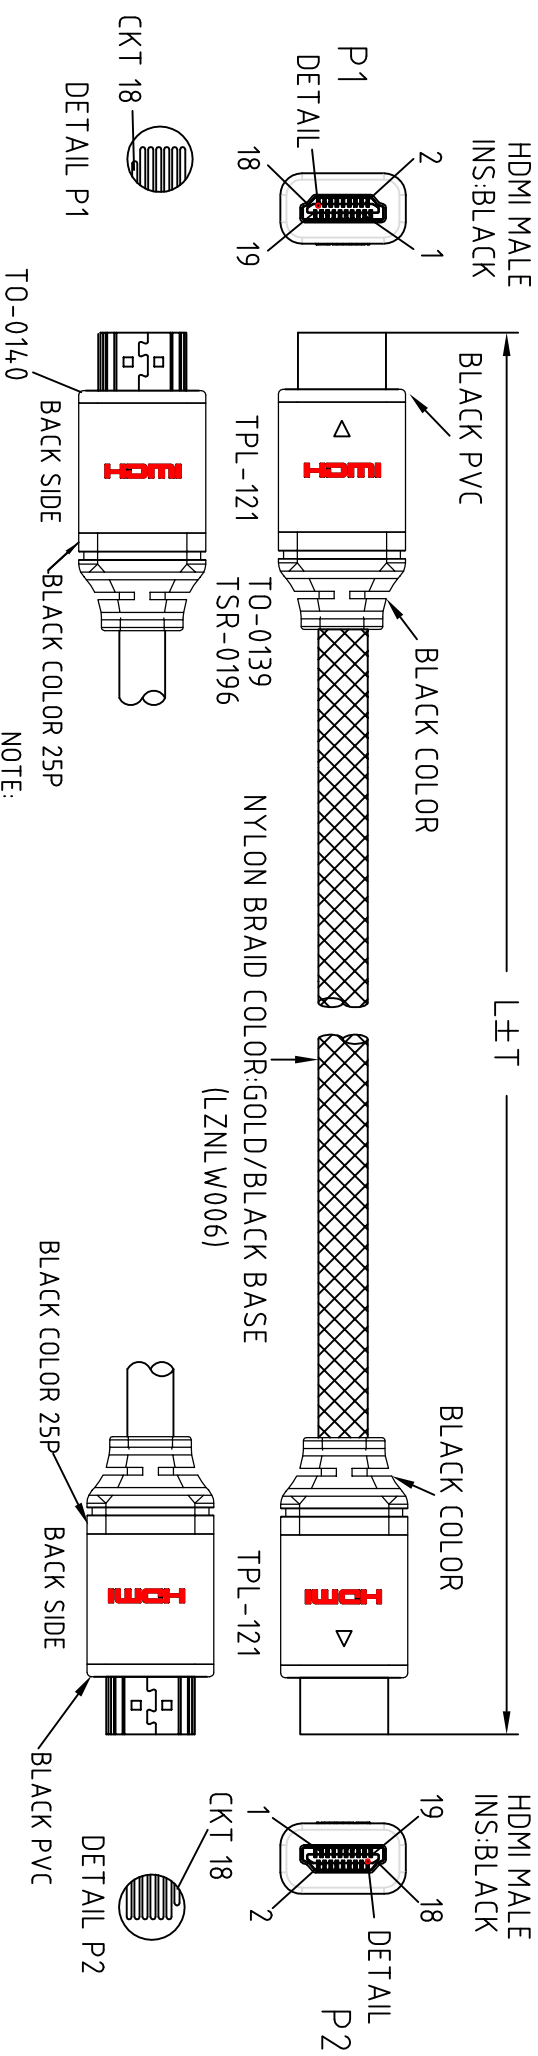

NOTE:

1. CABLE: UL-20276 [28AWG(7/0.127 T.C)×1P INS:FOAM-SKIN-PE+D.W(7/0.127 T.C)+Free-Edge-Foil/Mylar]×4C +28AWG(7/0.127 T.C)×1P INS:HD-PE+28AWG(7/0.127 T.C)×5C INS:HD-PE+AL/MY+B.D (85%) PVC JACKET OD:6.6±0.19mm COLOR:BLACK(INK-K01).

CABLE MUST PRINT: High Speed HDMI™ Cable

2. CONNECTOR:

P1&P2: HDMI 19P MALE W/PCB CONTACT: 15u" ; GOLD FLASH (1.8u") SHELL.

3. SHIELD: INNER MOLD MUST BE WRAPPED COPPER 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID 4. HOOD: P1&P2: ASS'Y TYPE, ALUMINUM HOOD GOLD PLATED,

SR: MOLDED TYPE, PVC 45P, COLOR: BLACK(INK-K01).

5. ELECTRICAL TEST: 100% OPEN SHORT & MIS WIRE TEST.

CONTACT RESISTANCE 3 ohm Max.

INSULATION RESISTANCE 10M ohm Min.

HI-POT DC300V

6. PACKING: EACH PC/POLYBAG+BIG HEADER CARD+BARCODE LABEL.

HDMI P1	PIN OUT	HDMI P2	CABLE FUNCTION
1		1	TMDS DATA 2+
2		2	TMDS DATA 2-
3		3	TMDS DATA 2-
4		4	TMDS DATA 2 SHIELD
5		5	TMDS DATA 1+
6		6	TMDS DATA 1-
7		7	TMDS DATA 1 SHIELD
8		8	TMDS DATA 0+
9		9	TMDS DATA 0-
10		10	TMDS DATA 0 SHIELD
11		11	TMDS CLOCK +
12		12	TMDS CLOCK -
13		13	TMDS CLOCK SHIELD
14		14	DDC DATA
15		15	DDC DATA
16		16	DDC DATA
17		17	DDC DATA
18		18	DDC DATA
19		19	DDC DATA
SHELL		SHELL	DDC DATA

200-1310-4	11.04.5565	5000	50	10	7611990189663
200-1310-3	11.04.5563	3000	30	20	7611990189656
200-1310-2	11.04.5562	2000	30	20	7611990189649
200-1310-1	11.04.5561	1000	20	20	7611990189618
DWG	P/N	L (mm)	T (mm)	PCS/CTN	BAR CODE NO.



Tolerance Inch M/M
.X .015 .30
.XX .010 .10
.XXX .005 .05

Draw	Customer P/N:
FANNIE 03/30/10'	
App'd	Customer: T-RAG
Scale NONE	Units M/M
Dwg No. 200-1310	REV: B
Sheet: 1/1	

Rotronic co., LTD.

High Speed HDMI with Nylon Braid CABLE

Customer P/N:

App'd

Scale NONE

Dwg No. 200-1310